
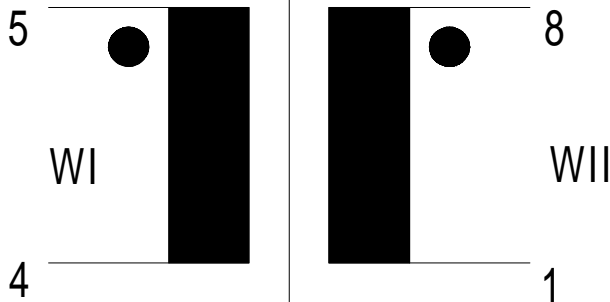


Technical Data Sheet

Customer:
Kaschke Göttingen

Part designation:
SP-E 16/5

Customer part no.:
CM-0,5-27mH

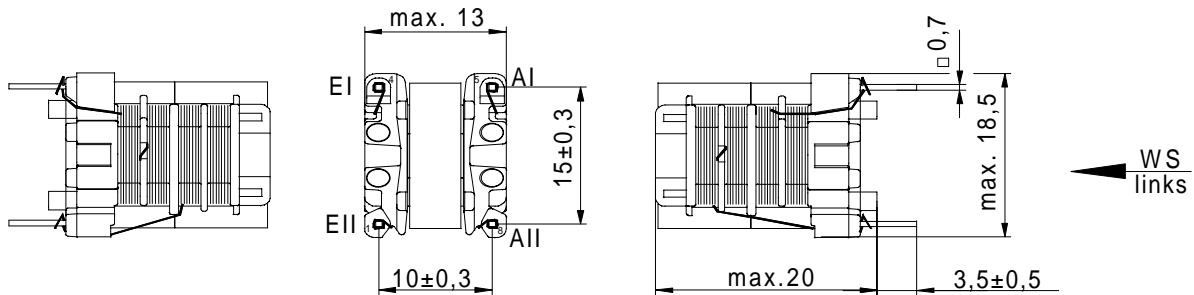

Core / material / air gap / AL	E16/5 K6000 or equiv.	
Nominal inductance	L= 2x27mH ±30%	
maximum transmissible power		
Working frequency		
Transformation ratio	1 : 1	
dielctric strength (50Hz/2s)	Prim-Sec = 1,5kV	
Nominal Current	0,5A	
Design in comp. with standard	DIN EN60938-2 approved	
Working / storage temperature	-25°C- +125°C	-25°C- +85°C
Miscellaneous	F (DIN 40040)	
R DC	max. 2 Ohm	

Remarks : **a.) marking**

Measuring device of L: **W&K 3260A**

Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: Uwe Dickhut	Date: 01.03.2007	Design regulation no.: 093.267	Index: 02
---	----------------------------	--	---------------------

PLEASE GIVE US YOUR WRITTEN RELEASE

<input type="text"/>	<input type="text"/>
Date	Signature