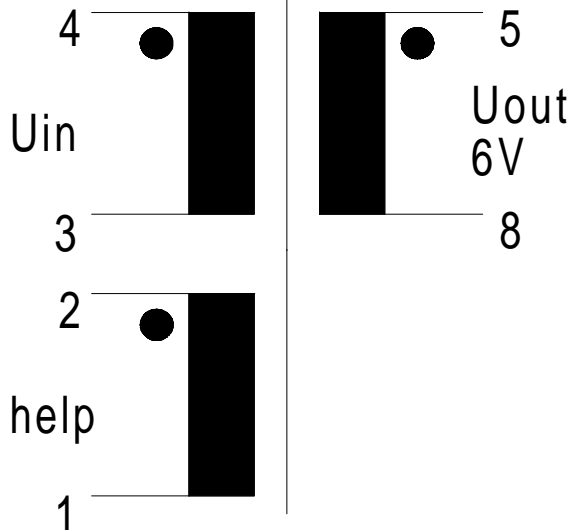
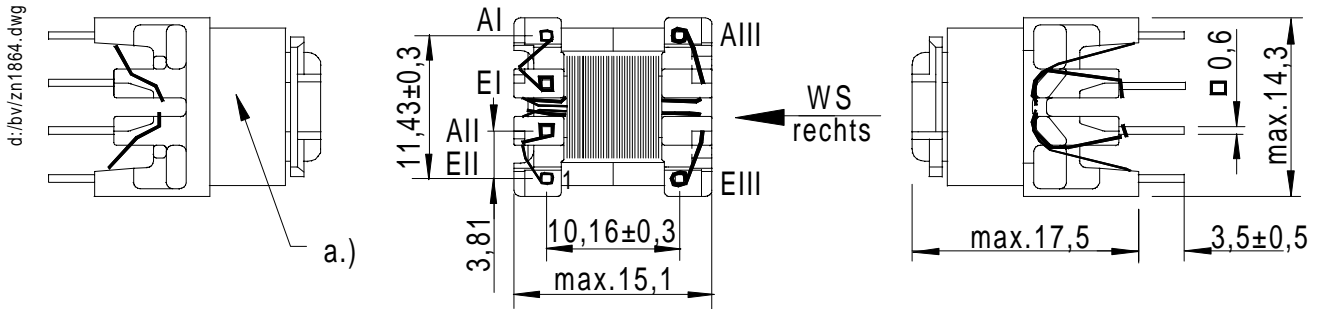


Technical Data Sheet

 Customer:
Kaschke Göttingen

 Part designation:
SP-E 13/6

 Customer part no.:
SLNK520-6-4


Core / material / air gap / AL	E13/6 K2006 or equiv.	
Nominal inductance	LI= 3,4mH ±15%	
maximum transmissible power	4W(LNK520-uni)	
Working frequency	132kHz	
Transformation ratio	140 : 41 : 16	
dielctric strength (50Hz/2s)	WI/WII-WIII: 3,75kV	
Nominal Current		
Design in comp. with standard	S98	
Working / storage temperature	-25°C- +120°C	-25°C- +85°C
Miscellaneous		
leakage inductance	max. 90µH	

 Remarks : **a.) marking**
 - creepage min. 6mm

 Measuring device of L: **W&K 3260A**

 Measuring conditions of L: **50mV/10kHz/22,5°C**

Measured quantity	Unit	No. 1	No. 2	No. 3	No. 4	No. 5

Responsible person: Uwe Dickhut	Date: 01.03.2007	Design regulation no.: 096.950	Index: 01
---	----------------------------	--	---------------------

PLEASE GIVE US YOUR WRITTEN RELEASE
Date Signature